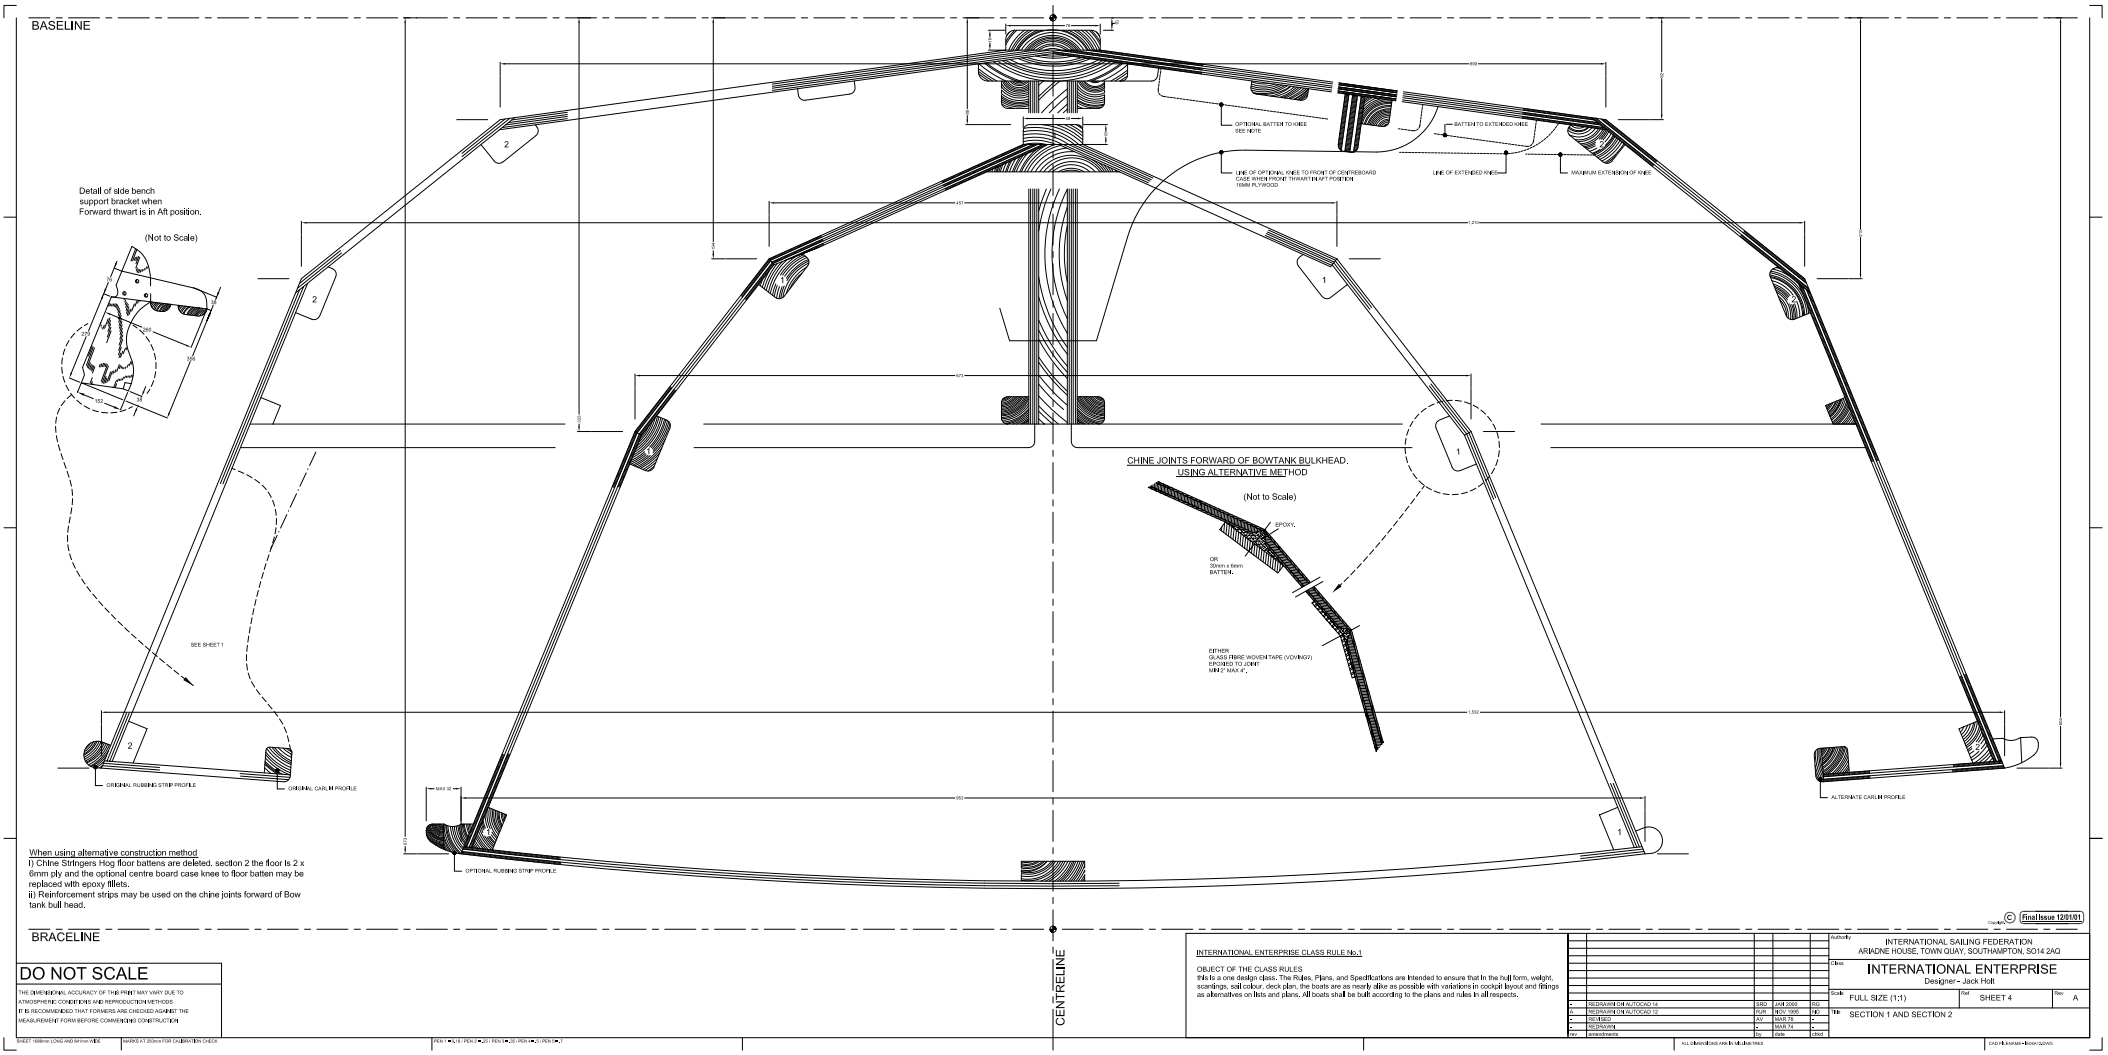

When using alternative construction method
i) Chine Stringers Hog floor battens are deleted. section 2 the floor is 2 x 6mm ply and the optional centre board case knee to floor batten may be replaced with epoxy fillets.
ii) Reinforcement strips may be used on the chine joints forward of Bow tank bull head.

Copyright © Final Issue 12/01/01

DO NOT SCALE

THE DIMENSIONAL ACCURACY OF THIS PRINT MAY VARY DUE TO ATMOSPHERIC CONDITIONS AND REPRODUCTION METHODS
IT IS RECOMMENDED THAT FORMERS ARE CHECKED AGAINST THE MEASUREMENT FORM BEFORE COMMENCING CONSTRUCTION

INTERNATIONAL ENTERPRISE CLASS RULE No.1

OBJECT OF THE CLASS RULES
this is a one design class. The Rules, Plans, and Specifications are intended to ensure that in the hull form, weight, scantings, sail colour, deck plan, the boats are as nearly alike as possible with variations in cockpit layout and fittings as alternatives on lists and plans. All boats shall be built according to the plans and rules in all respects.

Rev	Amendments	By	Date	Chkd
A	REDRAWN ON AUTOCAD 14	SRD	JAN 2000	RG
B	REDRAWN ON AUTOCAD 12	RJR	NOV 1995	NO
-	REVISED	AV	MAR 78	-
-	REDRAWN	-	MAR 74	-

Authority: INTERNATIONAL SAILING FEDERATION
ARIADNE HOUSE, TOWN QUAY, SOUTHAMPTON, SO14 2AQ

Class: INTERNATIONAL ENTERPRISE
Designer - Jack Holt

Scale: FULL SIZE (1:1) | Sheet: SHEET 4 | Rev: A

Title: SECTION 1 AND SECTION 2

SHEET 1688mm LONG AND 841mm WIDE | MARKS AT 250mm FOR CALIBRATION CHECK | PEN 1 = 1/4 / PEN 2 = .25 / PEN 3 = .25 / PEN 4 = .25 / PEN 5 = .7 | ALL DIMENSIONS ARE IN MILLIMETRES | CAD FILE NAME = BOWTANK.DWG